

**Suited for Oil Thickness Check
before Pressing etc.**

Utility Model 3142171
Registration Design 1359669

Optical Thickness Gauge


Uses

- Measures before pressing
- Measures after Mill


Specifications

- Contact-type
- Range:
Bright $0.3\text{g/m}^2 \sim 5\text{g/m}^2$
Dull $0.3\text{g/m}^2 \sim 3\text{g/m}^2$
- Liquid Viscosity: $1 \sim 10\text{cst}$
- Liquid Gravity: $0.8 \sim 1$
- Material: Glass
- Size: $\phi 50 \times 15(\text{H})\text{mm}$
- Weight: 50g

Principle

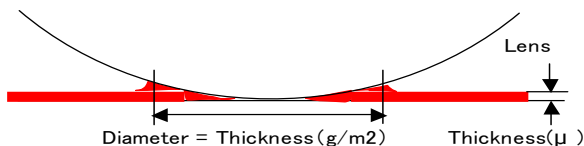


Standard : for Bright Plate STG001

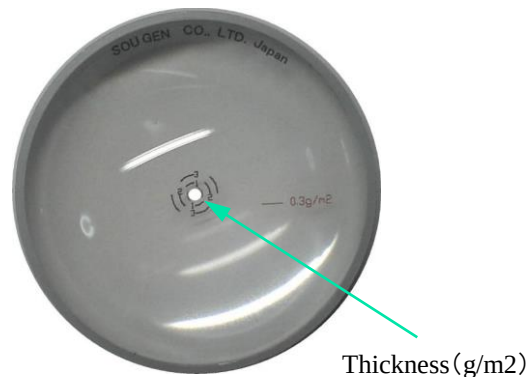

Special : for Dull Plate (凹凸Plate) STG002



*凹凸 Surface about $Ra0.6 \sim 1.1$

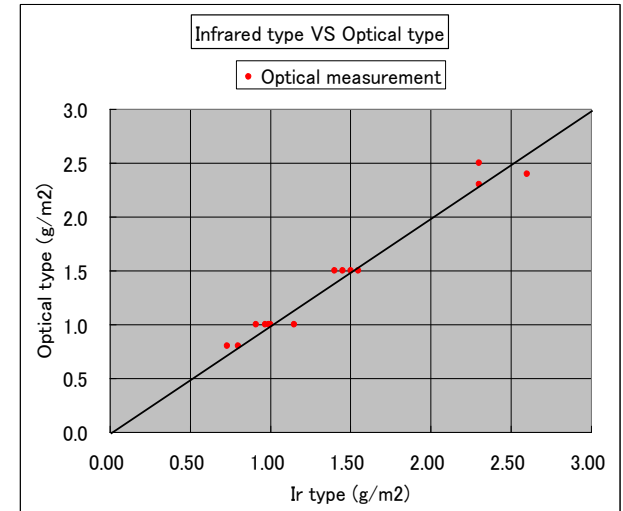

*Standard Type can use for Dull Plate
with attached Calibration table .



301 Harada Bldg 97 Yatori Toyohashi Aichi 441-8023 JAPAN
SOUGEN Corporation Yamanishi(Mr)
TEL: +81-532-35-1283 FAX: +81-532-35-1284
E-mail: info@sougen-co.jp